

FaceKiosk-H13A

Android Multipurpose Facial Recognition Kiosk



Compatible with
 ZKBioSecurity

Compatible with
 ZKBioTime



IP65 Waterproof



IP65 Dustproof

Overview

FaceKiosk-H13A, our 13.3-inch touch screen multipurpose facial recognition smart Kiosk using the Android system, is designed to provide a friendly and interactive user experience by incorporating a QR Code module and an RFID module in it.

FaceKiosk-H13A has a range of optional modules available, including a built-in RFID card reader and QR Code scanner, which help verify the user's identity through facial recognition, QR Code scanning and smart card reading, even a combination of authentication methods.

Facekiosk-H13A is developed based on the Android platform and supports ZKTeco EDK. It combines with a touch screen to facilitate the rapid deployment of third-party apps and provides clients with a high-quality and stable hardware development environment.

Facekiosk-H13A relies on the ZKTeco technology and synergies with its all-in-one software such as ZKBioSecurity and BioTime. It can be applied to many scenes and fields such as visitor self-service, conference display, e-learning classes, etc.


Features

- Standard Firmware: Visitor Management Firmware
- Supports ID Card module (Optional: IC Card module)
- Supports QR code modules (Optional: fingerprint modules; recognition modules for national ID cards of Argentina, Chile and Peru)
- Supports 1:1 and 1: N face comparison
- Supports TCP/IP, USB Host, Wi-Fi
- IP65 (waterproof and dustproof)
- Integrated binocular camera with anti-spoofing technology
- Interactive operation experiences
- Unique registration, one face template per user
- Strong flexibility and adaptability in applications
- Elegant appearance

Specifications

Record Capacity	100,000	Camera Pixel	2-megapixel
Face Template Capacity	10,000	Operating System	Android 5.1.1
User Capacity	10,000	RAM	2GB DDR3
Fingerprint Capacity	10,000	ROM	16GB
ID/IC Card Capacity	10,000	GHz	1.8GHz
Communication	TCP/IP, Wiegand, Wi-Fi	CPU	Quad-core A17 1.8GHz (ZKTECO boosted)
Display Type	13.3-inch capacitive touch screen	Power Supply	DC 12V, 3A
Display Resolution	1920*1080 pixels	Operating Environment	Operating Temperature: 0 to 50°C (32 to 41°F) Operating Humidity: <90% Storage Temperature: -40 to 60°C (-40 to 140°F) Storage Humidity: 20% to 90%
Communication Port	2*USB, 1*RJ45, TF card slot, RS232 / 485	Dimensions (L*W*H)	323 * 25 * 268 mm (12.72 * 0.98 * 10.55 in)

Configuration

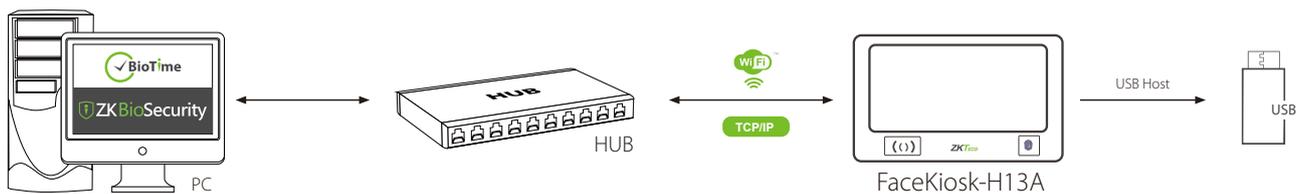

Dimensions (mm)

